



## DIRECTIONAL LEDS



### ED3700 Series SAE Class I Surface Mount

The versatile surface mount lights feature high-intensity LEDs providing exceptional warning synchronization capability and SAE Class I operation. Compact design, ability to fit confined mounting locations, zero maintenance and a 5-year warranty are just some of the many benefits. Available in single, split-, or dual-color variation and a double stack option. A range of accessory brackets are also available to further maximize mounting options.



#### Models

| PART NO. | COLORS                                                                              | AMPS | FLASH PATTERNS | LEDs | LENGTH | COLOR CONFIG. | STACK  |
|----------|-------------------------------------------------------------------------------------|------|----------------|------|--------|---------------|--------|
| ED3703X  |  | 0.4  | 21             | 3    | 3.7"   | Single        | Single |
| ED3704X  |  | 0.7  | 30             | 4    | 4.7"   | Single        | Single |
| ED3704XX |  | 0.7  | 22             | 4    | 4.7"   | Split         | Single |
| ED3744XX |  | 0.7  | 70             | 8    | 4.7"   | Dual          | Single |
| ED3705X  |  | 0.9  | 30             | 6    | 6.2"   | Solid         | Single |
| ED3705XX |  | 0.9  | 22             | 6    | 6.2"   | Split         | Single |
| ED3755XX |  | 0.9  | 70             | 12   | 6.2"   | Dual          | Single |
| ED3788X  |  | 1.2  | 62             | 8    | 4.7"   | Single        | Double |
| ED3788XX |  | 1.2  | 38             | 8    | 4.7"   | Split         | Double |
| ED3789XX |  | 1.2  | 70             | 16   | 4.7"   | Dual          | Double |

LED color: A = amber, B = blue, C = clear, G = green, R = red

#### Features and Benefits

- Performance, versatility and style, combined in a compact and sleek design enable installation in alternative locations of the vehicle
- Single, split- and dual-color options with multiple flash patterns, including steady burn and dimmable modes
- Synchronizable
- Polycarbonate lens and waterproof housing ensure extended life
- Temperature Range: -40°F to +149°F (-40°C to +65°C)

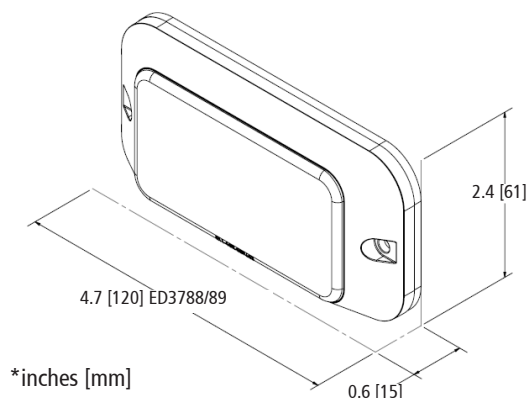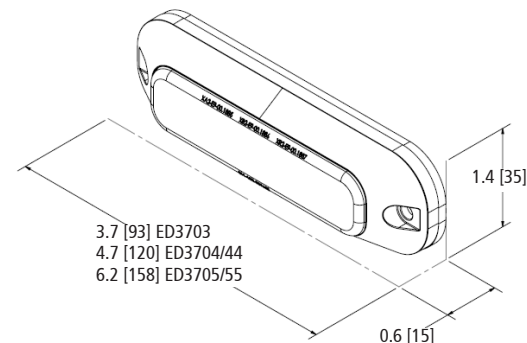

\*inches [mm]

#### Accessories

- Black Bezel (included with product)
- License Plate Bracket
- 90° Bracket
- Grille Bracket
- Lighthouse Programmer